

02

止回阀
Check Valve

主要参数 Main Parameter

公称压力: 1.6、2.5、4.0、16、32MPa
公称通径: DN10~200mm
适用介质: NG、O₂、N₂、Ar等气体或液体
适用温度: -196° C ~+80° C
连接形式: 焊接, 法兰
介质流向: 从阀瓣下面向上
试验检验: GB/T24925

Nominal Pressure: 1.6、2.5、4.0、16、32MPa
Nominal Diameter: DN10~200mm
Suitable Media: NG、O₂、N₂、Ar etc.
Suitable Temp.: -196°C ~+80°C
Connection Type: Welding, Flange
Flow Direction: Low to High
Standard: GB/T24925


主要零件材料 Material of Main Parts

阀体、阀盖、阀瓣: 不锈钢
密封件材质: PCTFE

Body, Cover, Disc: Stainless Steel
Sealing Material: PCTFE


产品特点 Main Parameter

1. 低温密封性能可靠
1. Reliable cryogenic sealing performance
2. 在线维修方便
2. Easy repairing



DH61F-40P


低温止回阀—国标承插焊
Cryogenic Check Valve—GB Socket Welding

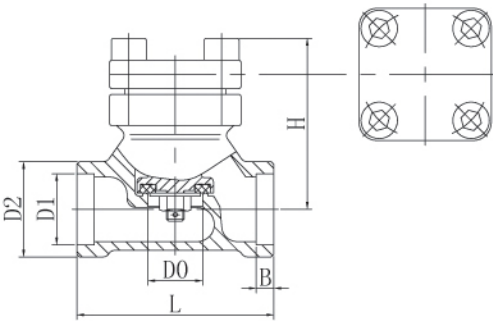

工厂代号 Factory Code	主要外形和连接尺寸(mm) Major Dimensions (mm)						重量 Weight
	H	L	D0	D1	D2	B	(Kg)
10DH6S	55.6	60	Φ13	Φ14.5	Φ24	6	0.60
15DH6S	62.1	65	Φ15	Φ18.5	Φ29.5	6	0.70
20DH6S	70.6	80	Φ20	Φ25.5	Φ36	8	1.45
25DH6S	78.1	90	Φ25	Φ32.5	Φ43.5	8	1.70
32DH6S	89.6	105	Φ32	Φ38.5	Φ53	8	2.30
40DH6S	98.6	120	Φ40	Φ45.5	Φ62	8	2.90
50DH6S	111.6	140	Φ50	Φ57.5	Φ72	10	4.80

DH61F-40P

低温止回阀—国标对接焊
Cryogenic Check Valve—GB Butt Welding

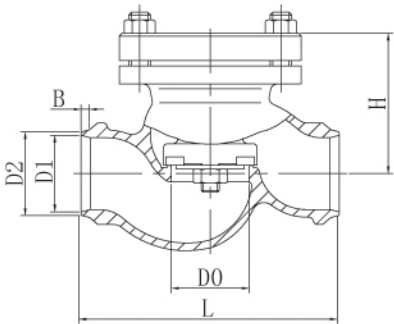

工厂代号 Factory Code	主要外形和连接尺寸(mm) Major Dimensions (mm)						重量 Weight
	H	L	D0	D1	D2	B	(Kg)
65DH6B	112	216	Φ65	Φ70	Φ76	7	11
80DH6B	124	241	Φ80	Φ81	Φ89	8	13
100DH6B	144	292	Φ100	Φ99	Φ108	9	26
125DH6B	200	330	Φ125	Φ123	Φ133	10	40
150DH6B	230	370	Φ150	Φ147	Φ159	10	50
200DH6B	280	419	Φ200	Φ207	Φ219	10	62