


DJ61F-40P


低温短轴日式截止阀—国标承插焊
Short Stem Cryogenic Globe Valve—Japanese Type—GB Socket Welding

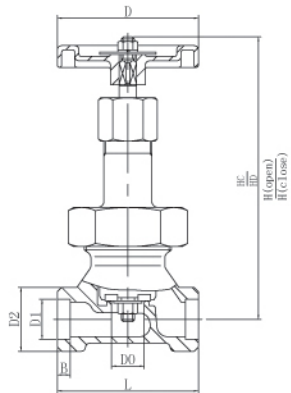

工厂代号 Factory Code	主要外形和连接尺寸(mm) Major Dimensions (mm)								重量 Weight
	H开 H(open)	H关 H(close)	L	D	D0	D1	D2	B	(Kg)
10DJ6S-GS-KC	131	125	60	Φ65	Φ13	Φ14.5	Φ24	6	0.65
15DJ6S-GS-KC	146	137	65	Φ80	Φ15	Φ18.5	Φ29.5	6	0.85
20DJ6S-GS-KC	152	141	80	Φ80	Φ20	Φ25.5	Φ36	8	1.15
25DJ6S-GS-KC	175	161	90	Φ100	Φ25	Φ32.5	Φ43.5	8	1.75
32DJ6S-GS-KC	184	169	105	Φ100	Φ32	Φ38.5	Φ53	8	2.45
40DJ6S-GS-KC	216	198	120	Φ125	Φ40	Φ45.5	Φ62	8	3.50
50DJ6S-GS-KC	225	204	140	Φ140	Φ50	Φ57.5	Φ72	10	5.15

DJ61F-40P


低温长轴截止阀—国标承插焊
Long Stem Cryogenic Globe Valve—GB Socket Welding

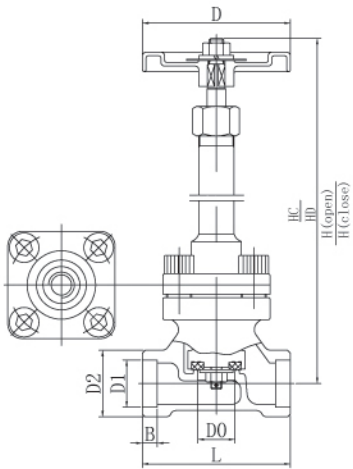

工厂代号 Factory Code	主要外形和连接尺寸(mm) Major Dimensions (mm)								重量 Weight
	H开 H(open)	H关 H(close)	L	D	D0	D1	D2	B	(Kg)
10DJ6S	218	212	60	Φ65	Φ13	Φ14.5	Φ24	6	0.95
15DJ6S	256	247	65	Φ80	Φ15	Φ18.5	Φ29.5	6	1.15
20DJ6S	261	250	80	Φ80	Φ20	Φ25.5	Φ36	8	1.55
25DJ6S	291	277	90	Φ100	Φ25	Φ32.5	Φ43.5	8	2.05
32DJ6S	301	286	105	Φ100	Φ32	Φ38.5	Φ53	8	2.85
40DJ6S	367	352	120	Φ125	Φ40	Φ45.5	Φ62	8	3.90
50DJ6S	375	354	140	Φ140	Φ50	Φ57.5	Φ72	10	5.55

DJ61F-40P


低温长轴截止阀—国标对接焊
Long Stem Cryogenic Globe Valve—GB Butt Welding

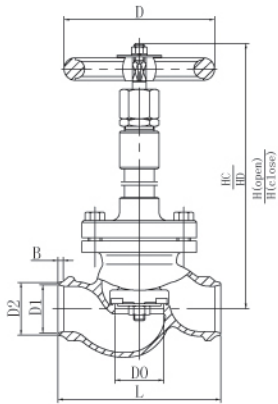

工厂代号 Factory Code	主要外形和连接尺寸(mm) Major Dimensions (mm)									重量 Weight
	H开 H(open)	H关 H(close)	介质流 Flow Direction	L	D	D0	D1	D2	B	(Kg)
65DJ6B	520	495	下进气 Low to High	216	Φ200	Φ65	Φ70	Φ76	7	16
80DJ6B	550	522		241	Φ250	Φ80	Φ81	Φ89	8	27
100DJ6B	655	602		292	Φ315	Φ100	Φ99	Φ108	7	37
125DJ6B	653	613	上进气 High to Low	330	Φ315	Φ125	Φ123	Φ133	7.5	60
150DJ6B	710	670		370	Φ315	Φ150	Φ147	Φ159	7.5	70
200DJ6B	935	882		419	Φ315	Φ200	Φ207	Φ219	10	85

DJ21F-320P

低温高压截止阀—国标承插焊
High Pressure Cryogenic Globe Valve—GB Socket Welding

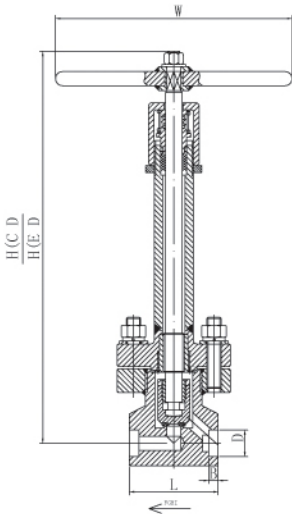

工厂代号 Factory Code	主要外形和连接尺寸(mm) Major Dimensions (mm)						重量 Weight
	H开 H(open)	H关 H(close)	L	W	D	B	(Kg)
10DJ10S	340	335	75	Φ200	Φ18.5	8	6
15DJ10S	340	335	75	Φ200	Φ22.5	8	6.5
20DJ10S	390	385	80	Φ250	Φ25.5	8	8
25DJ10S	390	380	90	Φ250	Φ32.5	8	8.5